



of KURA / profiKURA / KARERA / SIESTA / LOSPA

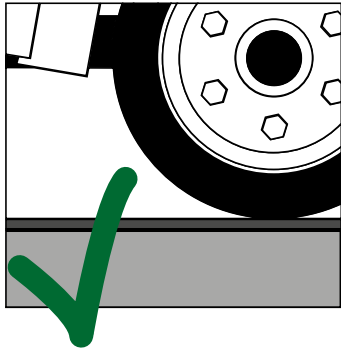

right

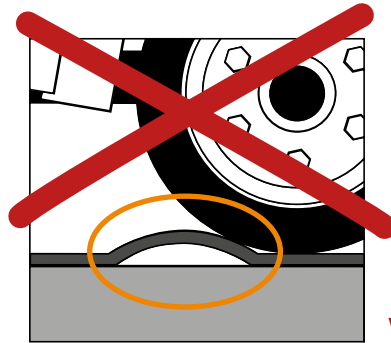

wrong



no visible bow wave should form!

Prerequisites:

► Tyres:

Vehicle weight, tyre width and required tyre pressure are all related. Therefore, the **required inflation pressure of the authorized tyres** is: **maximum 4 bar**




if the tyres need to be adapted:

approval by the vehicle manufacturer is necessary!

► Subsurface

- maximum slope: 2%



General framework:

► Driving mode:

- maximum speed = half walking speed (about 2 km/h)
- no abrupt steering actions, do not steer while standing still
- slow acceleration and gentle braking


► **The mat edges must be protected at the beginning and at the end of the alley!**

Mobile manure removal:

- the cleaning blade edge must be equipped with a rubber lip
- operation only with lowest resting pressure
- the cleaning blade is positioned either vertically or very flat on the surface



either

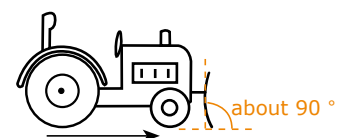

or:

